


CUSTOMER TO SUPPLY PROPER BRANCH
CIRCUIT PROTECTION AS PER LOCAL CODES.
(USE 75°C COPPER WIRE ONLY)

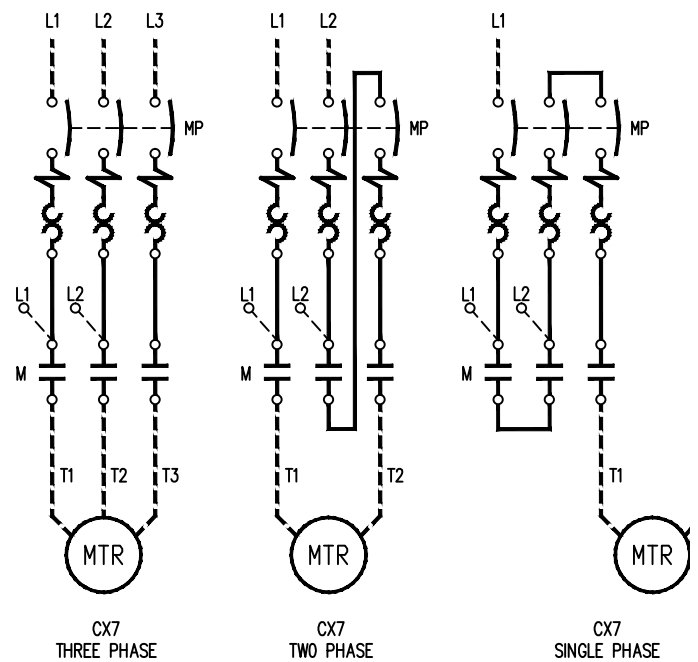

- NOTES:
1. MP: KT7 "TYPE E" MOTOR CONTROLLER
 2. DO NOT CONNECT A1-A2 TO L1-L2 UNLESS COIL VOLTAGE MATCHES LINE VOLTAGE
 3. OPTIONAL RUN LIGHT, MAY BE RED OR GREEN

A.C. Coil Code	Voltage Range		Control Source	
	60 HZ	60 Hz	CBK7	CAK7
24Z	24V	24V	Separate	Separate
120	110V	120V	Common	Separate
208	~	208V	~	Common
220W	~	208V-240V	Common	Common
240	220V	240V	Common	Common
D.C. Coil Code	Voltage Range		Control Source	
	VDC		CBK7	CAK7
24E	24V		Separate	Separate

-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
1	ADDED CBX7.	7-30-2014	CG
REV	CHANGE	DATE	BY

NOTICE

THIS DRAWING IS THE CONFIDENTIAL PROPERTY OF SPRECHER+SCHUH, INC. and, as such, is subject to recall at any time. The drawing may not be reproduced, used or disclosed for any purpose except as authorized by SPRECHER+SCHUH, INC.

DRAWN BY:
WEH

CHECKED BY:
MLF

APPROVED BY:
MLF

DATE
04-09-2010

KWKSTARTERS II
FULL VOLTAGE NON-REVERSING
C(B)X7-9...23(E)-__-P*

sprecher+schuh HOUSTON, TX

DWG. NO.
CX7 WS-114-51