







Beacons G 120 mm ø CE

Type	Description	Specifications	Catalog Number ①		Price
			Grey Housing	Black Housing	
	WLG Steady Beacon (no bulb) ②	up to 250 V AC/DC	822 10 900	822 50 900	67.85
	FLG Strobe Beacon (Xenon tube included)	24 V AC/DC, ~5 J 230/240 V AC, ~5 J	842 14 405 842 13 313	842 54 405 842 53 313	194.50
	DLG LED-Steady Beacon Amber, red and yellow only	24 V AC/DC 48 V AC/DC 110/120 V AC 230/240 V AC	827 10 405 827 10 408 827 10 310 827 10 313	827 50 405 827 50 408 827 50 310 827 50 313	298.53
	BLG LED-Flashing Beacon Amber, red and yellow only	24 V AC/DC 48 V AC/DC 110/120 V AC 230/240 V AC	807 10 405 807 10 408 807 10 310 807 10 313	807 50 405 807 50 408 807 50 310 807 50 313	339.24
	Bracket for all "G" models		822 200 900	822 200 900	31.66

Strobe Beacons Z CE

Type	Description	Specifications		Catalog Number	Price
		Voltage/Strobe	Lens Color	Dark Grey Housing	
	BZG Strobe Beacon Xenon tube included	24 V DC, 15 J	Amber	741 041 005	613.34
			Red	741 042 005	
Yellow	741 047 005				
		230/240 V AC, 15 J	Amber	741 031 313	613.34
			Red	741 032 313	
			Yellow	741 037 313	


① To complete the catalog no., replace the ❷ with one of the following numbers for desired lens color:

1 = Amber, 2 = Red, 4 = Clear, 5 = Blue, 6 = Green, 7 = Yellow.


② Bulb not included. Order separately on page J23.




Strobe Beacon XB2 €

Type	Description	Specifications	Catalog Number	Price
	Replace ☉ with lens color	Voltage/Strobe	Black Housing ❶	
	XB2 Strobe Beacon Xenon tube included Amber and red only	12 V DC, 2 J	D118 52☉ 004 ☉	44.33
		24 V DC, 2 J	D118 52☉ 005	
		24 V AC, 2 J	D118 52☉ 305	
		230 V AC, 2 J	D118 52☉ 313	

Strobe Beacon Signalling Sounder €

Type	Description	Specifications	Catalog Number	Price
			Black Housing	
	VS4 Strobe Beacon Signaling Sounder Not available in yellow 230/240 V AC	Amber	410 401 005	R/F
		Red	410 402 005	
		Clear	410 404 005	
		Blue	410 405 005	
		Green	410 406 005	

LED Flashing Multi-tone Siren €























Type	Description	Specifications	Catalog Number		Price
			Red Housing	White Housing	
	CS1 LED Flashing Multi-tone Siren Not available in green or yellow 24 V DC	Amber	C111 621 005	C111 221 005	267.88
		Red	C111 622 005	C111 222 005	

- ❶ To complete the catalog no., replace the ☉ with one of the following numbers for desired lens color:
1 = Amber, 2 = Red, 4 = Clear, 5 = Blue, 6 = Green, 7 = Yellow.
- ☉ Special order only. Minimum quantities apply. Contact Sprecher + Schuh for more information.





Mini Horn-Signal Beacons



CE

Type	Description	Specifications	Catalog Number	Price
	Replace  with lens color		Grey Housing 	
	KLL Mini Horn Signal Beacon with cone Steady of Flashing (no bulb)   92 dB @ VDC 88 dB @ VAC, 50 Hz	24 V DC 24 V AC, 50 Hz 48 V AC, 50 Hz 230 V AC, 50 Hz	710 11  005 710 11  105 710 11  108 710 11  113	153.70
	KLF Mini Horn Strobe Beacon with cone Xenon tube included  92 dB @ VDC 88 dB @ VAC, 50 Hz	24 V DC 230/240 V AC, 50 Hz	710 12  005 710 12  113	232.74
	KDL Mini Horn Signal Beacon without cone Steady of Flashing (no bulb)   92 dB @ VDC 88 dB @ VAC, 50 Hz	24 V DC 24 V AC, 50 Hz 48 V AC, 50 Hz 230 V AC, 50 Hz	710 01  005 710 01  105 710 01  108 710 01  113	158.31
	KDF Mini Horn Strobe Beacon without cone Xenon tube included  92 dB @ VDC 88 dB @ VAC, 50 Hz	24 V DC 230/240 V AC, 50 Hz	710 02  005 710 02  113	235.20

Mini Horns


CE

Type	Description	Specifications	Catalog Number	Price
			Grey Housing	
	KLH Mini Horn with cone continuous tone 92 dB @ VDC 88 dB @ VAC, 50 Hz	12 V DC	710 100 004	81.42
		24 V DC	710 100 005	
		110 V DC	710 100 010	
		220 V DC	710 100 013	
		24 V AC, 50 Hz	710 100 105	
		48 V AC, 50 Hz	710 100 108	
		110 V AC, 50 Hz	710 100 110	
230 V AC, 50 Hz	710 100 113			
	KDH Mini Horn without cone continuous tone 92 dB @ VDC 88 dB @ VAC, 50 Hz	12 V DC	710 000 004	74.18
		24 V DC	710 000 005	
		110 V DC	710 000 010	
		220 V DC	710 000 013	
		24 V AC, 50 Hz	710 000 105	
		48 V AC, 50 Hz	710 000 108	
		110 V AC, 50 Hz	710 000 110	
230 V AC, 50 Hz	710 000 113			

 To complete the catalog no., replace the  with one of the following numbers for desired lens color:



1 = Amber, 2 = Red, 7 = Yellow.


 Bulb not included. Order separately on page J23.

 Other voltages and colors available by special order only. Contact factor for more information.



Signal Horns CE


Type	Description	Specifications	Catalog Number	Price
		❶	Grey Housing	
	HPT Signal Horn Impact resistant synthetic housing continuous tone (108 dB)	24 V DC 110 V DC 220 V DC 24 V AC, 50 Hz 48 V AC, 50 Hz 110 V AC, 50 Hz 230 V AC, 50 Hz 120 V AC, 60 Hz 240 V AC, 60 Hz	712 100 005 712 100 010 712 100 013 712 100 105 712 100 108 712 100 110 712 100 113 712 100 211 712 100 213	294.00
	HTG Signal Horn Die-cast aluminum housing continuous tone (108 dB)	24 V DC 110 V DC 220 V DC 24 V AC, 50 Hz 48 V AC, 50 Hz 110 V AC, 50 Hz 230 V AC, 50 Hz 120 V AC, 60 Hz 240 V AC, 60 Hz	713 100 005 713 100 010 713 100 013 713 100 105 713 100 108 713 100 110 713 100 113 713 100 211 713 100 214	542.78

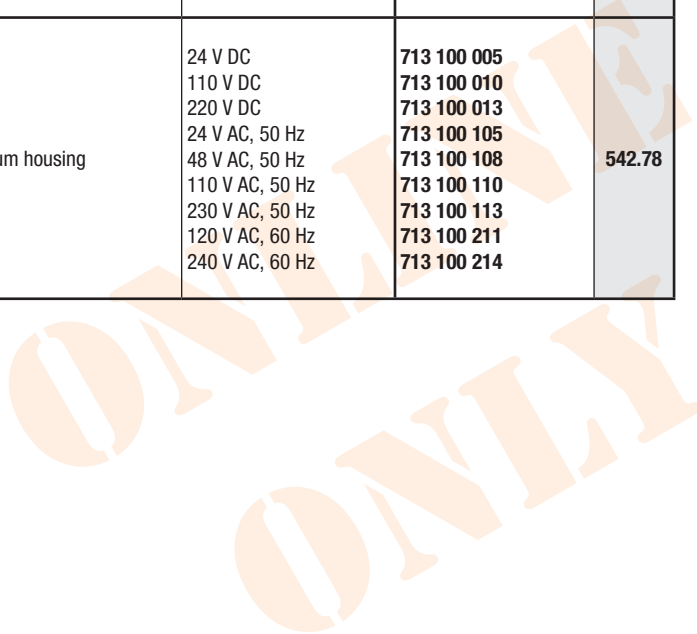


❶ Other voltages available by special order only. Contact factory for more information.





Signal Bells CE

Type	Description	Specifications	Catalog Number		Price
			Grey Housing	Red Housing	
 <p>Signal Bells BEL Bell tone or quick beat (106 dB)</p>		24 V AC 115 V AC 230 V AC	720 300 105 720 300 110 720 300 313		R/F
		12 V DC 24 V DC	720 300 004 720 300 005	720 400 005	R/F

Electronic Multi-tone Sirens CE

Type	Description	Specifications	Catalog Number		Price
			Red Housing	White Housing	
	ES1	24 V DC, 32 tones (106 dB)	C110 620 005	C110 220 005	99.14
	ES2	110 - 230 V AC, 32 tones (106 dB)	C115 600 113	C115 200 113	243.42

Electronic Sounders CE





Type	Description	Specifications	Catalog Number		Price
			Type D (DIP Switch)	Type K (Terminals)	
 <p>EHS-D EHS-K Electronic Sounder swiveling speaker (118 dB)</p>		12-24 V AC/DC 230/240 V AC, 40-60 Hz	731 010 405 731 010 313	731 020 405 731 020 313	1062.94
	 <p>EHL-D EHL-K Electronic Sounder short fixed speaker (110 dB)</p>		12-24 V AC/DC 230/240 V AC, 40-60 Hz	730 010 405 730 010 313	730 020 405 730 020 313

Non-UL Signaling




M28 Panel Mount Alarms



Type	Description	Specifications	Catalog Number		Price
			Grey Housing	Black Housing	
	ESD Panel Mount Alarm continuous tone (90 dB)	24 V AC/DC 230/240 V AC	810 000 405 810 000 313	810 100 405 810 100 313	69.16
	ESP Panel Mount Alarm pulsing tone (90 dB)	24 V AC/DC 230/240 V AC	811 000 405 811 000 313	811 100 405 811 100 313	87.61
	ESZ-S Panel Mount Alarm continuous/pulsing tone with spades (90 dB)	24 V AC/DC 230/240 V AC	809 000 405 809 000 313	809 100 405 809 100 313	110.66
	ESZ-K Panel Mount Alarm continuous/pulsing tone with terminal (90 dB)	24 V AC/DC 230/240 V AC	809 010 405 809 010 313	809 110 405 809 110 313	110.66
	BU2 Panel Mount Alarm pulsing tone (90 dB) ①	12 V AC/DC 24 V AC/DC		B100 520 404 B100 520 405	23.05
	BU3 Panel Mount Alarm pulsing tone (90 dB) ①	220 V AC		B100 520 313	23.05

BU1 Surface Mount Alarms



	Surface Mount Alarm Electronic Siren pulsing tone (108 dB)	12 V DC 24 V DC		B100 510 004 B100 510 005	44.27
---	--	--------------------	--	------------------------------	-------

① Adjustable sound pressure.